


TrimBonder™ HB (High Build)



Apply TrimBonder HB sandable coating to boards.

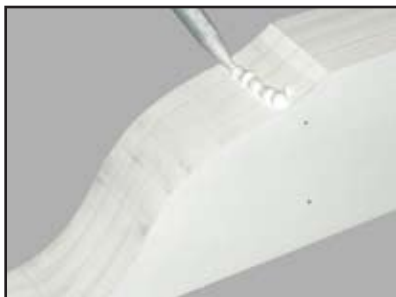

Spread adhesive over surface using spatula.



Sand after 1st coat, then apply 2nd coat and sand again. Use 180-220 grit for a nice, smooth finish.



Smooth, clean finish after 2nd coat has been sanded.

- ▶ Creamy consistency for ease of application
- ▶ Sands easily
- ▶ Build thicknesses to $\frac{1}{16}$ "

Surfacing CPVC boards “cut edge” to a smooth finish, like the CPVC skin, eliminating porosity and pitting.

▶ Order Information

DESC.	STOCK NO.	PACKAGE
TrimBonder™ HB	74801	400 ml cartridge
GP Manual Gun	14401	
Mix Nozzle	74601	

ITW Devcon
30 Endicott St.
Danvers, MA 01923
800-933-8266
www.trimbonder.com